


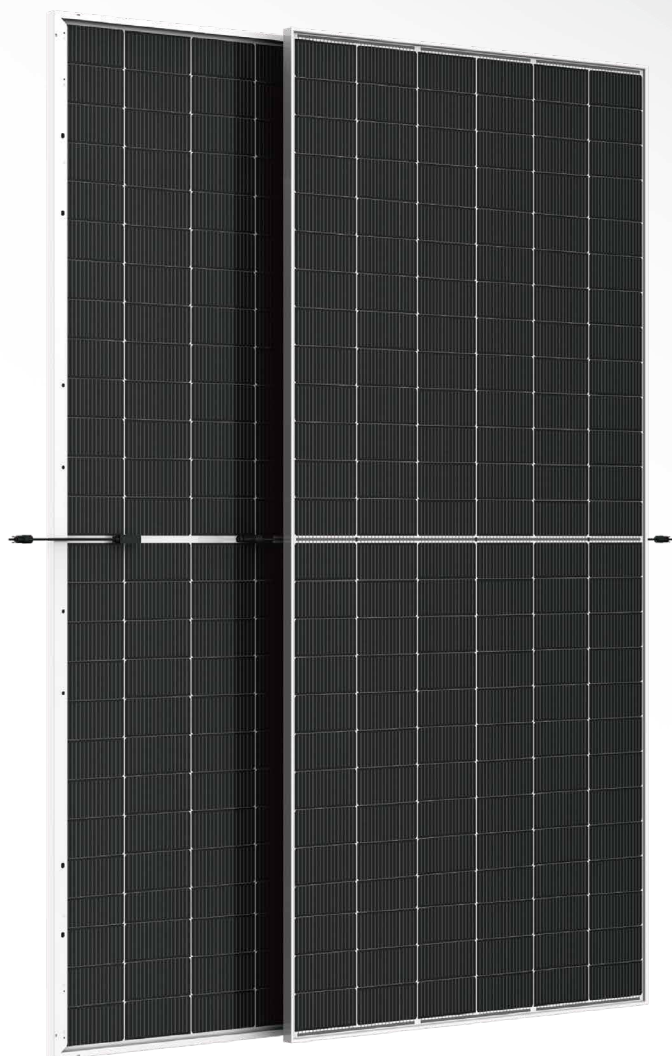

CHG ENSOL Efficient PV Module

N-TOPCon Technology

CHGMN78D4

N-type Mono High Efficiency
Double Glass Bifacial PV Module

725-750W

750W

Maximum
Power Output


23.35%

Maximum
Module Efficiency

0~+5W

Positive power
tolerance

CHGMN78D4 Linear performance warranty

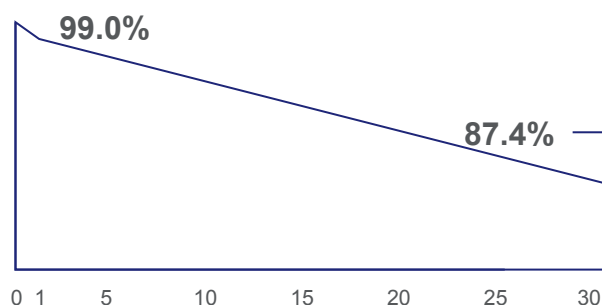

Excellent Power Output

Adopting large-sized, highly efficient cell technology and leading manufacturing processes to effectively enhanced product power



Excellent Temperature Coefficient

The product has excellent temperature coefficient, outstanding outdoor power generation performance and longer lifespan



Ultra-multi-busbar Technology

Better light utilization and current collection capability, effectively improving product power output and reliability



No LeTID/LID

While achieving efficiency gains in N-type photovoltaic cells, virtually no LID loss



Excellent Irradiance Response

Superior weak-light power generation performance in environments such as early morning, evening, and cloudy conditions.




High Profitability

Effectively reducing the system's BOS costs, achieving lower cost of electricity, and increasing project return



IEC61215(2016), IEC61730(2016)
ISO14001: 2015 Environment Management System
ISO9001: 2015: Quality Management System
ISO45001: 2018: Occupational health and safety management systems



Electrical Properties | STC*

Peak Power (Pmax/W)	725	730	735	740	745	750
MPP Voltage (Vmp/V)	48.43	48.57	48.71	48.84	48.98	49.12
MPP Current (Imp/A)	14.97	15.03	15.09	15.15	15.21	15.27
Open Circuit Voltage (Voc/V)	57.72	57.92	58.12	58.32	58.52	58.72
Short Circuit Current (Isc/A)	15.86	15.92	15.98	16.04	16.10	16.16
Module Efficiency (%)	22.57	22.73	22.88	23.04	23.20	23.35

*STC (Standard Test Conditions): Irradiance 1000 W/m², cell Temperature 25°C, AM 1.5

Mechanical Properties

Cell Type	n-type half cell
Number of Cells	156pcs(2*78)
Module Dimension	2465mm*1303mm*33mm
Weight	39.0kg
Front / Rear Glass	2.0mm/2.0mm
Frame	Anodized Aluminum Alloy
Junction Box	IP68
Output cables	TUV 1x4.0mm², +300mm/-200mm or Customized Length

Temperature Coefficient

Temperature coefficients of Pmax	-0.29% / °C
Temperature coefficients of Voc	-0.25% / °C
Temperature coefficients of Isc	+0.045% / °C
Nominal Module Operating Temperature	42±2 °C

Operating Properties


Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V DC (IEC)
Maximum Series Fuse Rating (A)	35A
Power Tolerance	0~+5W
Bifaciality	80%±5%
Static load	Snow load 5400Pa, Wind load 2400Pa
Packaging Configuration	33pcs/pallet, 660pcs/13m flatcar 33pcs/pallet, 726pcs/17.5m flatcar

Electrical Properties | BNPI*

Peak Power (Pmax/W)	803	809	814	820	825	831
MPP Voltage (Vmp/V)	48.43	48.59	48.72	48.84	48.99	49.14
MPP Current (Imp/A)	16.58	16.65	16.71	16.79	16.84	16.91
Open Circuit Voltage (Voc/V)	57.74	57.94	58.14	58.34	58.54	58.74
Short Circuit Current (Isc/A)	17.57	17.64	17.71	17.77	17.84	17.91


*Bifacial Test Conditions (BNPI): Front-side irradiance 1000W/m², back-side irradiance 135W/m², temperature 25°C, AM1.5

Engineering Drawings (unit: mm)

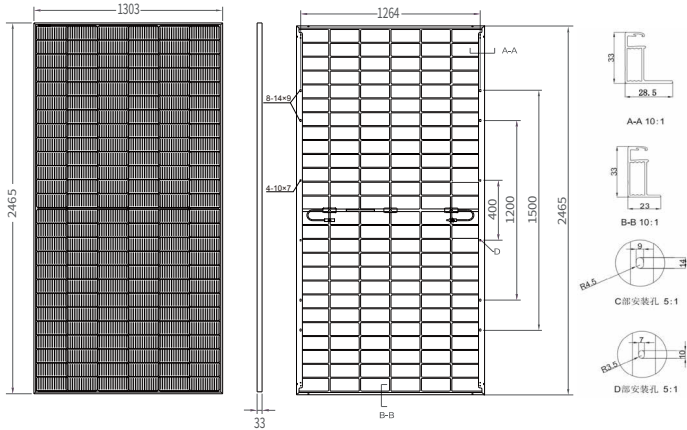


For specific dimensions and tolerance ranges, please refer to the corresponding component drawings.


Characteristic Curves: CHGMN78D4



Current and voltage curves under different irradiances



Power and voltage curves under different irradiances



Temperature Curves of Isc, Voc, Pmax under Different Temperatures